



# WICLINE 65 evo/ WICLINE 75 evo Tilt slide window

In this space saving opening version the sash can be tilted or slid away to the side with ease. High operation comfort, versatile ventilation positioning without disturbing sash and the elevated technical performance values are characteristic for this opening type of the WICLINE evo aluminium window system.

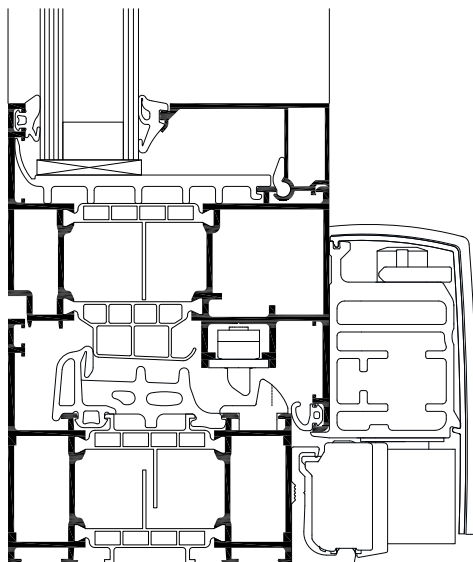

**System test results/CE product pass in accordance with DIN EN 14351-1:2006+A1:2010**

Air permeability:	Class 4
Watertightness:	E750
Resistance to wind load:	Class C5/B5
Operating forces:	Class 1
Mechanical strength:	Class 4
Repeated opening/closing:	Class 2 (10,000 cycles)
Quality assurance:	Certified according to ISO 9001:2008



**Technical performance:**

**Profile technology:**

- High insulation multi-chamber system in symmetric design, quality assured thermal insulator connection
- Patented corner and butt joint connection technology for high rigidity of frames and sashes
- Infill thickness up to 69 mm

**Thermal insulation:**

- $U_f$  values: until 1.2 W/(m<sup>2</sup>K)

**Sealing concept:**

- Voluminous centre gasket in corner vulcanised frames

**Fittings:**

- Tilt slide fittings, optionally
  - without force operation
  - with force operation (wfo)
- Sash weight:
  - Up to 160 kg
  - Up to 200 kg (wfo)
- Sash formats (w x h):
  - Up to 1685 mm x 2500 mm
  - Up to 2000 mm x 2700 mm (wfo)

**Compatible with the door series  
WICSTYLE 65 evo and WICSTYLE 75 evo**