


WICSTYLE 77FP

Fire protection door

EI30/T30 and EI60/T60

This aluminium door in modular set-up fulfils the requirements of class EI30 and/or class T30/F30 for single and double-leaf doors without the need for fire protection inserts. Simply by adding these, class EI60 and/or T60/F60 are achieved. A full range of fanlight or fixed top or lateral glazings assure a comprehensive application range.

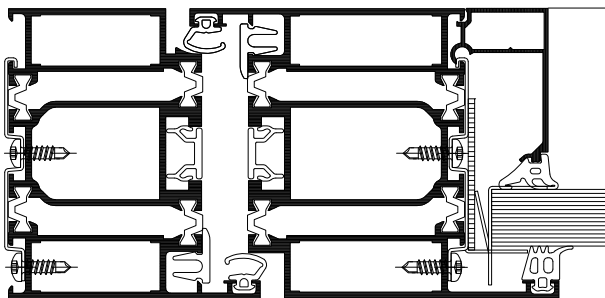

Approval in accordance with national regulations:
Please contact your WICONA sales office.



Technical performance:

Profile technology:

- WICSTYLE 77FP is approved for the German market, for other countries the national regulations must be respected.
- Tested according to standards DIN 4102 and DIN EN 13501-2
- Execution in fire protection classes EI30/T30/F30 without fire protection inserts
- Execution in fire protection classes EI60/T60/F60 simply by adding fire protection inserts
- For single and double leaf hinged doors, inward and outward opening
- Fixed glazings, lateral lights and fanlights possible in many options
- Identical profile elevation as in the door series WICSTYLE 65 evo and WICSTYLE 75 evo, allowing for a unique design in a building project

Fittings:

- Butt hinge or screwed hinges in the same design as for WICSTYLE standard series, leading to a harmonised building design
- Extensive fittings for requirements such as panic functions, emergency exit seals, electric safety locks, electronic openers, revolving door drive with magnet and bolt contact
- Big unit sizes possible: (w x h) until 1362 mm x 2500 mm (single leaf), or 2500 mm x 2500 mm (double leaf)
- Max. leaf weight: until 200 kg

