


WICSTYLE

Door systems

Bullet resistance

Personal security and building protection – for your building you need a solution approach which can be accomplished with aluminium systems in a wholistic and compatible way. This is achieved by the WICONA series for windows, curtain walls and doors. Each of them can be executed in bullet resistance, in combination with other additional functions. The requirements for bullet resistance are achieved with various WICSTYLE door profile combinations, simply by addition of the standard construction with a special aluminium planking.

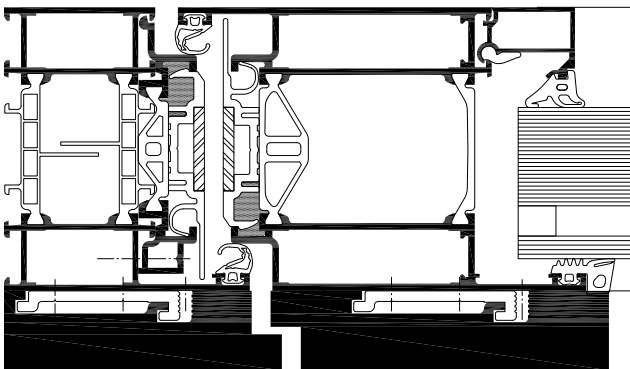

WICSTYLE 75 evo in class FB4

System test results / CE product pass in accordance with DIN EN 14351-1

See classification of the respective WICSTYLE door series

Technical performance:

Bullet resistance according to DIN EN 1522

- The bullet resistance requirements for doors are regulated Europe wide in the standard DIN EN 1522. The new door series WICSTYLE 65 evo and WICSTYLE 75 evo have been tested according to this standard in various profile combinations, and successfully been certified in class FB4 S and FB4 NS.
- Bullet resistance can be combined with burglar resistance in the classes RC1N, RC2N, RC2, RC3 according to DIN EN 1627.

Possible combinations with other WICONA product series in bullet resistance in class FB4:

- Windows WICLINE 65 evo / WICLINE 75 evo
- Stick curtain walls WICTEC 50

Bullet resistance according to DIN EN 1522 / classifications:

WICSTYLE 65 evo /
WICSTYLE 75 evo
Hinged doors, single
or double leaf, inward
or outward opening

FB4 S / FB4 NS