


WICLINE 65 evo /  
WICLINE 75 evo  
Integration sash  
Turn / tilt-turn / turn sash

The ideal combination: WICTEC stick system curtain walls with integrated opening sashes from the WICLINE window series. The versatile systems with extended performances offer individual solutions on highest technical and design level, adaptable with a large selection of additional functions.

2 |

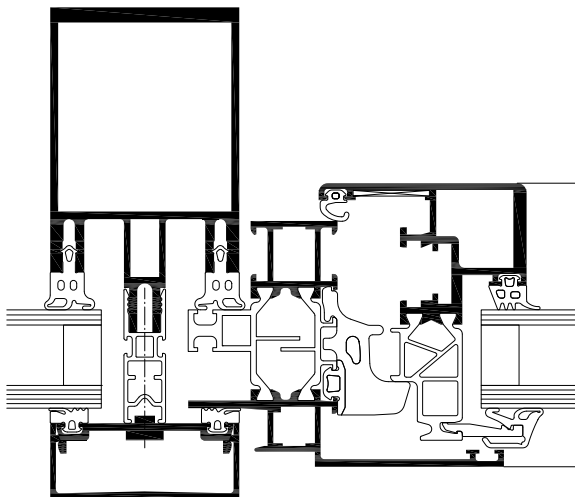

**System test results / CE product pass in accordance with DIN EN 14351-1:2006+A1:2010 and DIN EN 13830**

See classification of the WICLINE window series and the WICTEC curtain wall series.

1 |



**Technical performance:**

**Profile technology:**

- High insulation multi-chamber system in symmetric design, quality assured thermal insulator connection
- Patented corner and butt joint connection technology for high rigidity of frames and sashes

**Thermal insulation:**

- $U_f$  values until 1.2 W/(m<sup>2</sup>K)
- $U_{CW}$  values depending on the combination of curtain wall and sash

**Inward opening options:**

- Turn / turn-tilt / tilt window
- Concealed sash
- Burglar resistance

**Fittings:**

- Heavy duty system fittings with:
  - visible hinges, powder coating or anodization in all colours
  - concealed hinges with integrated end position damping, opening angle max. 105°
- Sash weight:
  - Visible turn / tilt fittings: up to 160 kg
  - Concealed turn / tilt fittings: up to 200 kg
  - Turn hinges (on demand): up to 300 kg
- Sash sizes (w x h): 1700 mm x 2500 mm
- Optionally with opening limiter in various executions