


» WICLINE 65N
Non-insulated windows



The WICLINE 65N aluminium window is ideally suited for buildings in which specific heat protection measures are unnecessary. Ideal as well for the use as NSHEV (Natural Smoke and Heat Exhaust Ventilator).

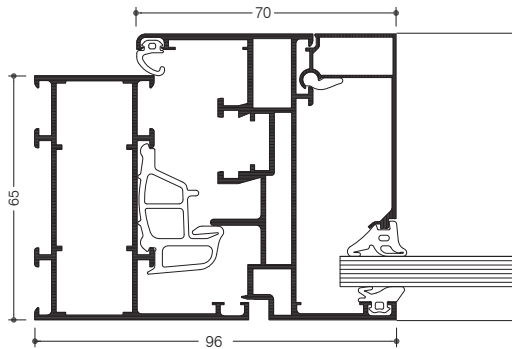

Technical performance:

Profile technology:

- High quality aluminium profiles, without thermal break
- Patented corner and butt joint connection technology for high rigidity of frames and sashes
- Infill thickness up to 58 mm

Hardware:

- Concealed single-handed operated fittings, alternatively with:
 - Visible hinges
 - Concealed hinges
- Sash weight:
 - Up to 100 kg
- Sash sizes (w x h): 1300 mm x 1700 mm

Additional designs non-insulated:

- Window-doors / French doors
- NSHEV applications
- Burglar resistance

**Compatible with the door series
WICSTYLE 65N non-insulated**

System test results / CE product pass in accordance with DIN EN 14351-1:2006+A1:2010

Air permeability:	Class 4
Watertightness:	9A
Resistance to wind load:	Class C5 / B5
Operating forces:	Class 1
Repeated opening / closing:	Class 2 (10 000 cycles)
Burglar resistance:	WK1, WK2
Quality assurance:	Certified according to ISO 9001:2008
Environmental management:	Certified according to ISO 14001

