


» WICSTYLE 65 Hinged doors

The solution for high-traffic areas is based on the successful concept of the WICSTYLE evo doors and, with a 65 mm profile, is fully compatible with other solutions for ease of fabrication. The equipment and tools for manufacture remain the same.

The WICTYLE 65 door for high-traffic areas is also fully compatible with WICTEC façade systems and WICLINE window systems.

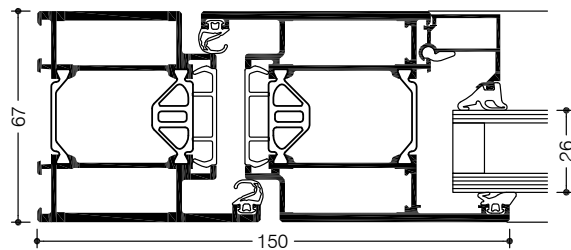

WICSTYLE 65 – version for high-traffic areas

Test results for product standard NF EN 14351-1

Air permeability:	Class 4
Driving rain resistance:	Class 7A
Ability to withstand wind load:	Class C2
Soundproofing:	$R_w (C; C_w) = 43 (-2; -5) \text{ dB}$
Impact resistance:	Class 3
Mechanical strength:	Class 3
Continuous operation:	Class 8 1 000 000 cycles
Load capacity of safety devices:	Fullfilled
Operating forces:	Class 2



Integration in windows and façades



Technical performance:

Profile technology:

- Reinforced, thermally insulated multi-chamber system
- Inwards or outwards opening
- Single- or double-leaf
- Infill thicknesses: 3 mm to 50 mm
- Tight, accessible threshold
- Locks on PVC supports

Thermal insulation:

- $U_d = 1.7 \text{ W/(m}^2\text{K)}$ with $U_g = 1.1 \text{ W/(m}^2\text{K)}$

Hardware:

- Rolled strip:
 - Maximum weight 2 strips: 130 kg
 - Maximum weight 3 strips: 150 kg
- Max. leaf sizes (w x h): 1500 mm x 2600 mm

