


» WICSTYLE 77FP
Fire protection door
EI30/T30 and EI60/T60

This aluminium door in modular set-up fulfils the requirements of class EI30 and/or class T30/F30 for single and double-leaf doors without the need for fire protection inserts. Simply by adding these, class EI60 and/or T60/F60 are achieved. A full range of fanlight or fixed top or lateral glazings assure a comprehensive application range.

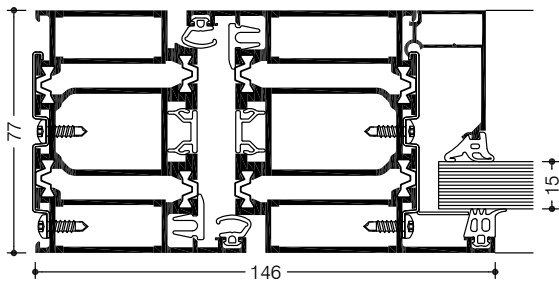

Technical performance:

Profile technology:

- Approved by building authorities
- CE marking according to DIN EN 16034 EI₂ 30-C₅S₂₀₀
- Execution in fire protection classes EI30/T30/F30 without fire protection inserts
- Execution in fire protection classes EI60/T60/F60 simply by adding fire protection inserts
- For single and double leaf hinged doors, inward and outward opening
- Fixed glazings, lateral lights and fanlights possible in many options
- Identical profile elevation as in the door series WICSTYLE 65 evo and WICSTYLE 75 evo, allowing for a unique design in a building project

Hardware:

- Butt hinge or screwed hinges in the same design as for WICSTYLE standard series, leading to a harmonised building design
- Extensive fittings for requirements such as panic functions, emergency exit seals, electric safety locks, electronic openers, revolving door drive with magnet and bolt contact
- Max. leaf sizes (w x h):
up to 1462 mm x 2990 mm (single leaf),
or 2943 mm x 2990 mm (double leaf)
- Max. leaf weight: up to 260 kg

System test results / CE product pass in accordance with DIN EN 14351-1:2006+A1:2010

Air permeability:	Class 4
Watertightness:	Class 6A
Resistance to wind load:	Class C3 / B3
Burglar resistance:	RC1N, RC2N, RC2

△ Approval in accordance with national regulations

